


Universal Remote Control

Battery Installation and Information

Programming Device - Code Input Setting

Code List

GDRC-890DGW

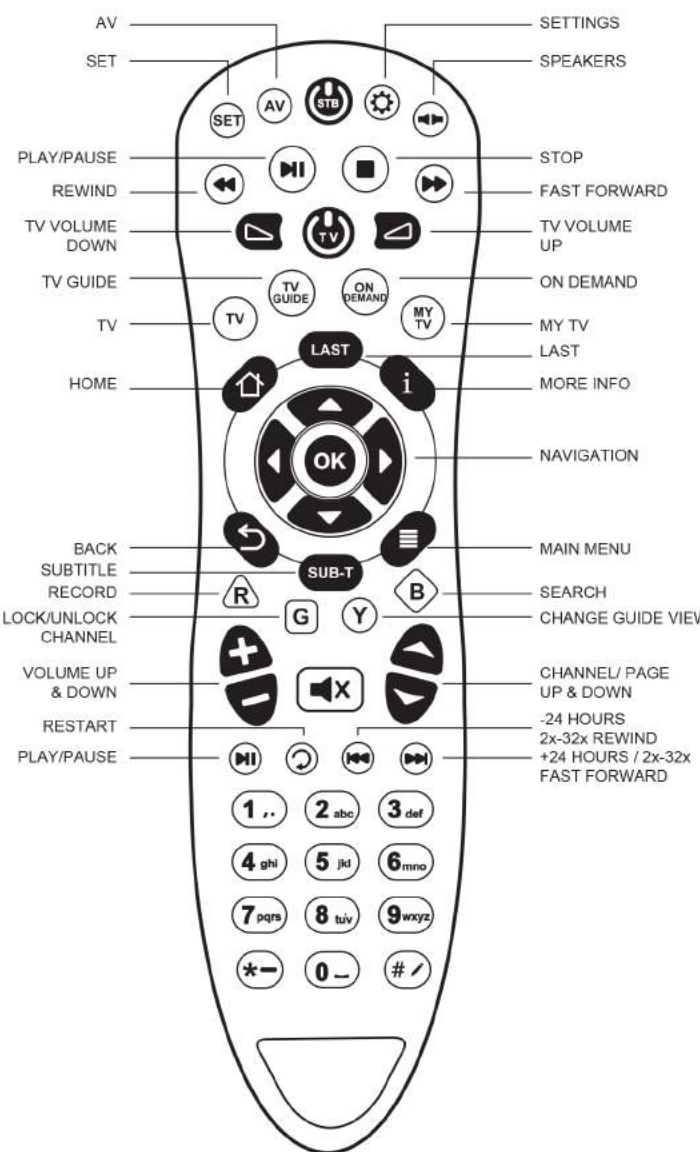

The GDRC-890DGW remote control requires two AA Batteries. To install the batteries

- 1** Remove the battery cover.
- 2** Insert the batteries, matching the batteries to the (+) and (-) marks inside the battery compartment.
- 3** Press and push the battery cover back into the place.

Caution:
If you do not plan to use the remote for an extended period, remove the batteries. They can leak chemicals that can destroy electronic parts.

Overview

GDRC-890DGW Remote control is the newly designed 2in1 remote controlling for 2 devices of TV & CBL. You can program your Remote Control to operate most models of most brands of infrared remote-controlled TV's in the world including the most updated Flat Screen TV's.

» Default Setting
TV: LG
CBL: Digtel STB

Your Favorite
For future reference, please write down working codes you are setting in the TV:



Device Type: _____

Note: When the remotes battery has dropped below 2.4V, the LED will flash 15 times indicating Low Battery.

- 1** Turn on the TV Power.
- 2** Locate the 4 digit code corresponding to your device in the code list.
1.. 5 jk 8 tuv 9 wxyz
- 3** Press "SET" button until the LED lights up, and then release all buttons.
- 4** Input the 4 digit number you chose from the code list. The LED will flash one time for every digit you enter. Once the correct code is entered the LED will light off and exit the program mode.
1.. 2 abc 3 def 4 gh 5 jk 6 mno 7 pqrs 8 tuv 9 wxyz 0 -
- 5** If the wrong code is entered, the LED will flash 3 times indicating exit of the setting mode. Please repeat step 4 or follow the Auto search mode programming option.
- 6** After inputting the codes, please test the remotes working status on the device. If device is not controllable, please choose another set of 4 digital codes from the code list & repeat step 1-4 to make sure your remote is workable.
Note: If not keys pressed in 20 seconds, the LED will light off to exit the setting mode.

Programming Device - Auto Searching Mode

If you could not find the correct 4 digital number after many times of code inputting, please use auto searching to locate the correct one:

- 1** Turn on the device you will control.
- 2** Press "SET" button until the LED lights up, and then release all buttons.
- 3** Aim Remote to the device (TV), press "TV POWER" button until the TV turns off, and then release all buttons.
- 4** Please test other function keys under TV are working. If any of the functions are not working properly, please repeat step 1-3 to locate the correct codes.
Note: If not keys pressed in 20 seconds, the LED will light off to exit the setting mode.

Note: When the remotes battery has dropped below 2.4V, the LED will flash 15 times indicating Low Battery.

Codes: TV

A	A_nity	1428 1438 1439 1445
	Abex	1770
	Accurian	1252
	Acer	1144
	Action	1078
	Adentura	1740
	Admiral	1622 1557 1557 1682 1684 1689 1012 1024
	Advent	1707 1042 1058 1186 1048 1057 1282
	Advertura	1545
	Aiko	1011
	Aiwa	1747 1465 1744 1524 1154 1573 1576 1621 1465 1739 1054 1035 1215 1044 1157 1266 1284 1002 1030 1109 1216 1220 1332 1478
	Akai	1552 1744
	Alaron	1034 1063
	Albatron	1465
	Aleron	1581 1588 1643 1646
	Amar	1550 1745
	Ambassador	1597 1020
	Ampro	1664 1699 1522
	Anam	1586 1581 1582 1653 1669 1597 1020
	Anam National	1708 1708 1756 1757
	Aoc	1002 1096 1155 1191 1192 1308 1314 1362 1372 1387 1436 1440 1523 1531 1560 1573 1576 1581 1739 1752 1199
	Acmni	1361 1041 1044 1086 1111
	Apex Digital	1083 1046 1302 1453
	Ascent	1481
	Astar	1181 1226
	Asus	1413
	Audiovox	1011 1020 1023 1027 1051 1065 1079 1124 1126 1184 1241 1244 1252 1260 1263 1286 1293 1294 1320 1363 1380 1404 1530 1567 1597 1608 1759
	Auria	1314 1337
	Aventura	1018
	Axon	1286
B	Baysonic	1597
	Bell&Howell	1557 1015
	BenQ	1136 1089 1714 1461
	Blue Light	1483 1484
	Bradford Brillan	1020 1597
	Broksonic	1087 1603 1605 1753 1537 1024 1271 1284 1287 1021 1288 1280 1134
	Byd.sign	
C	C & M	1034
	Candle	1002 1501 1545 1573 1576 1629 1652 1729 1739 1746 1007 1739
	Carnivale	1007 1707
	Carver	1108
	Casio	1027
	CCE	1044
	Celera	1000 1555
	Celebrity	1576
	Centurion	1597
	Cetronic	1154
	Champion	1044
	Changhong	1498
	ChiMei	1759
	Cineral	1002 1003 1008 1011 1213 1214 1279 1284 1545 1570 1573 1576 1589 1597 1602 1626 1629 1643 1652 1729 1739 1740 1746
	Citizen	1531 1752 1020 1597 1442 1597
	Clairtone	1182 1202 1339 1341 1342 1344 1346 1347 1348 1349 1350 1351 1352 1353 1354 1383 1422 1423 1432 1433
	Clarion	1004 1166
	Clariss	1729 1576
	Classic	1701 1597 1531 1520 1764 1752 1020
	Coby	1643 1597 1653 1020 1419 1707 1007 1000 1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Commercial Solutions	1597
	Concerto	1729 1576
	Contec	1701 1597 1531 1520 1764 1752 1020
	Coronado	1643 1597 1653 1020 1419 1707 1007 1000 1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Craig	1597 1653 1020 1419 1707 1007 1000
	Crosley	1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Crown	1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Curtis	1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Curtis Mathes	1012 1013 1015 1023 1025 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Cxc	1597
D	Daewoo	1003 1011 1015 1023 1027 1029 1030 1210 1270 1279 1454 1530 1567 1571 1572 1575 1582 1585 1596 1597 1602 1608 1614 1624 1625 1632 1634 1643 1644 1665 1675 1679 1729 1759 1729 1576 1643
	Daytron	1121 1094 1258 1373 1104 1013
	Dell	1304
	Denon	1185
	Diamond Vision	1240
	Digistar	1211 1265 1323 1774 1001
	Disney	1576 1597 1018 1019 1024 1020 1186 1211 1090
	Durabrand	1760 1767 1534 1597
	Dwin	1309 1248 1171 1327 1254
	Dynasty	1597
	Dynex	1597
E	Electroband	1531 1555 1752 1000
	Electrograph	1234 1199
	Electrohome	1608 1643 1672 1764 1024 1186 1212 1214 1399
	Electron	1399
	Element	1426 1326 1402 1264 1219 1003 1015 1018 1019 1020 1021 1023 1024 1027 1158 1210 1211 1259 1264 1268 1270 1271 1272 1279 1280 1289 1299 1304 1325 1328 1426 1530 1531 1537 1550 1552 1567 1576 1576 1577 1004 1166
	Emprex	1729 1576
	Encross	1701 1597 1531 1520 1764 1752 1020
	Envision	1643 1597 1653 1020 1419 1707 1007 1000 1597 1643 1646 1020 1003 1361 1139 1355 1371 1399 1428 1434 1447 1450 1106 1002 1003 1004 1007 1008 1035 1102 1148 1210 1297 1465 1557 1570 1573 1576 1628 1643 1689 1707 1709 1017 1729 1739 1748 1759 1767 1768 1597
	Epson	1080
	ESA	1739 1191 1314 1155 1308 1002 1055 1551 1098 1054 1018 1289 1299 1711
F	Fisher	1604 1565 1773 1015 1154 1402
	Fluid	1744 1742 1521 1552 1052 1032 1067
	Fujitsu	1577 1597 1744 1766 1552 1158 1018 1020 1123 1267
	Funai	1299 1000 1300 1618 1020 1597
G	Gateway	1234 1235
	Ge	1004 1005 1019 1023 1044 1148 1166 1183 1269 1273 1465 1544 1547 1563 1576 1708 1738 1741 1751 1759 1765 1767
	General Electric	1573 1594 1630 1631 1657 1661 1662 1664 1682 1683 1684 1689 1698 1729 1018 1211 1259 1264 1299 1325
	GFM	1774 1739 1001 1002 1256 1539
	Gibraltar	1729 1576 1578 1579 1580 1581 1587 1635 1643 1644 1646 1528 1576 1739 1738 1757 1770 1019 1002 1003 1277
	Go video	1386 1410
	Goldstar	1501 1499 1032 1597 1744 1552 1020
H	Haiier	1416 1233 1232 1231 1186 1338 1340 1411 1090 1047 1374 1729 1576 1738 1019 1247
	Hall Mark	1149 1150 1397 1229 1247
	Hanns.G	1744 1552 1267
	Hannspree	1707 1007
	Harley Davidson	1597 1020
	Harman Kardon	1012
	Harvad	1538 1073
	Havermy	1023
	Helios	1205 1096 1174 1095 1097
	Hello Kitty	1597
	Hewlett Packard	1326 1041 1135 1209 1316 1424 1356 1366
	Himitsu	1003 1013 1031 1049 1101 1147 1165 1206 1267 1395 1455 1500 1526 1527 1557 1576 1586 1604 1627 1637 1638 1639 1641 1643 1646 1691 1702 1706 1729 1762 1764 1768 1770
	Hitachi	1174 1095 1097 1418 1066 1112 1130
	HP	
	Hyundai	
I	I-inc	1230
	ILo	1158 1171 1127 1197 1211 1217 1301
	In_nity	1007
	Infinity	1655 1707
	Initial	1197 1301
	Inkel	1670
	Insignia	1309 1164 1204 1184 1248 1018 1024 1157 1176 1139 1107 1209 1265 1299 1327 1364 1365 1368 1394 1412 1315 1305 1254 1774 1773 1001
	Inteq	1329
	iRIS	1406 1416 1405
	iSymphony	1081
	IX	
J	Janeil	1545 1740
	Jbl	1655 1707 1007
	Job	1555 1000
	JCM	1334 1329
	Jopenny	1573 1729 1576 1576 1611 1630 1631 1643 1657 1672 1684
	Jensen	1574 1707 1042 1058 1139 1382 1411 1057 1132 1282 1613 1620 1636 1640 1661 1501 1245 1195 1336 1343 1028 1335 1024 1006 1116 1212 1274 1443 1444 1040
	JVC	
K	Kaypani	1560
	KDS	1175 1219
	Kec	1597 1020
	Kenwood	1573 1613 1739 1002
	KLH	1044 1046
	Kloss	1629 1559 1545 1740
	Kmc	1646
	Kinka	1525
	Kolin	1502 1503
	Konka	1157 1038
	Kost	1120 1173
	Kreisen	1080
	Ktv	1573 1576 1589 1597 1643 1455 1500 1526 1527 1557 1576 1586 1604 1627 1637 1638 1639 1641 1643 1646 1691 1702 1706 1729 1762 1764 1768 1770
L	LG	1001 1002 1019 1034 1070 1104 1122 1138 1164 1243 1283 1303 1357 1367 1398 1417 1474 1477 1482 1485
M	Mad	1615 1645
	MAG	1175 1219
	Magnasonic	1272 1279
	Magnavox	1573 1729 1576 1523 1609 1644 1646 1651 1652 1655 1657 1684 1707 1523 1559 1562 1566 1739 1744 1745 1167 1168 1261 1385 1359 1234 1007 1018 1005 1437 1400 1301 1299 1289 1281 1272 1267 1155 1051 1002 1037 1180 1117 1105 1269 1576 1557 1557 1768 1573 1576 1655 1674 1675 1707 1575 1739 1167 1007 1036 1159 1002 1068 1069 1224 1370 1655 1669 1457 1022 1028 1234 1236 1043 1110 1224 1263 1034 1588 1576 1738 1456 1744 1768 1019 1013 1531 1752 1729 1604 1557 1669 1675 1576 1552 1248 1278 1275 1019 1015 1024 1014 1186 1211 1212 1265 1266 1271 1287 1081 1277 1573 1729 1586 1672 1675 1576 1456 1739 1738 1019 1014 1002 1269 1576 1576 1577 1674 1675 1563 1767 1774 1770 1570 1465 1004 1001 1005 1003 1681 1197 1301 1544 1741 1729 1577 1586 1621 1622
	Magnin	
	Majestic	
	Marantz	
	Matsui	
	Matsushita	
	Maxent	
	MB Quart	
	Megapower	
	Megatron	
	Mei	
	Memorex	
	Mga	
	Mga/Mitsubishi	
	Midland	
	Minerva	
	Mintek	
	Minutz	